



T-BOX LP Ultra-Low-Power Wireless RTU

Compact, battery or solar-powered solution for remote automation and monitoring.

The T-BOX LP ultra-low-power wireless RTU cost effectively extends advanced IP, Web, and telemetry technologies to practically any remote location. To meet all installation needs, it is available in a very compact, self powered DIN rail-mounting module or IP68 package, shown here.



The T-BOX LP ultra-low-power wireless RTU is a complete solution for remote automation and monitoring. It is available in an IP68 package and has been approved for operation in Zone 2 hazardous areas. Ultra-low current draw allows long life using lithium ion batteries or solar power systems.

T-BOX LP incorporates programmable automation, calculations, and logic operations with support for IEC 61131-3 Ladder Diagram, Basic, and Microsoft Windows Automation. Four analog inputs, eight discrete inputs (including two with counting capabilities), eight discrete outputs, and a serial RS-485 interface meet the I/O requirements of a broad array of applications.

With T-BOX LP, remote locations also benefit from the advanced IP, Web, and telemetry technologies provided by Semaphore's T-BOX architecture. T-BOX technology provides users real-time access to alarms, live information, and historical data, anytime, anywhere, through a standard Web browser. T-BOX LP best manages inexpensive, public networks by transmitting information via e-mail, IP, and SMS text messaging, only when necessary, and allows personnel to be kept fully up-to-date using a mobile phone or PDA.

Integrating the T-BOX IP/Web technology platform in a rugged, compact package, T-BOX LP provides the highest automation and monitoring capabilities in an ultra-low-power platform.

T-BOX LP Ultra-Low-Power Wireless RTU

T-BOX LP can be installed in practically any remote location and cost-effectively stays in touch with operations staff using push communications. T-BOX LP also drops-in to existing SCADA networks using common protocols such as Modbus.



Applications

T-BOX LP is ideal for remote automation and monitoring applications in a broad variety of industries, including agriculture, energy management, mobile asset management, oil & gas, smart grid, soil remediation, telecommunications, transportation, utilities, vendor-managed inventory, and water/wastewater.



The DIN rail-mounting package, shown here, presents a very compact footprint for installation in third-party enclosures.

T-BOX LP Ultra-Low-Power Wireless RTU

Bringing T-BOX technology to remote site automation and monitoring:

Communications Management

Timely updates on consumables, inventory and process status substantially reduce site visits. Intelligent management of communications and push technology minimize networking costs while providing the comprehensive information that is needed to optimize maintenance and operations. T-BOX LP transmits alarms, live updates and historical reports via e-mail, SMS text, or IP when required without continual polling on the network.

Integral Web Server

T-BOX LP serves very informative Web pages, which comprise an inexpensive HMI for operations and local maintenance. Semaphore's WebForm Studio greatly simplifies configuration of web pages using dynamic objects.

Alarm Management

Using multi-media messaging, T-BOX LP notifies multiple recipients upon an alarm and escalates unacknowledged alarms. Users can acknowledge alarms via phone, PDA, or PC.

Data Logging

T-BOX LP supports sophisticated archiving that maintains values in the form of averages, maxima, minima or instantaneous samples to provide reports for auditing, maintenance, and optimization purposes.

SCADA Compatibility

T-BOX LP is also compatible with traditional SCADA systems, which use a variety of common protocols such as Modbus.

Programmable Automation


Automation tasks, custom calculations and logic operations are programmable using IEC 61131-3 ladder diagram or BASIC. Microsoft Automation support allows compilation of source from Microsoft Excel, Visual Basic, etc.

Integrated Packaging


The compact, easy-to-install, IP68 package completely integrates the T-BOX platform, communications devices, and batteries. For installations in third-party enclosures, a DIN rail-mounting package is also available.

Ultra Low Power Management

Ultra low-power consumption keeps power source costs at a minimum and provides long life using a single lithium battery or solar power system. Unlike most "low power" devices, T-BOX LP can source loop current for 4–20 mA instruments.

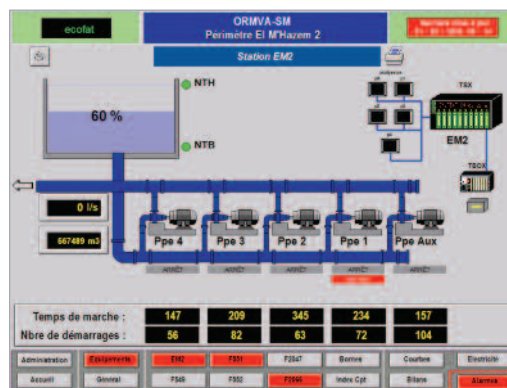

Web pages can be dynamic, "mimic" displays, which incorporate multiple process objects, tabular displays or trend displays.

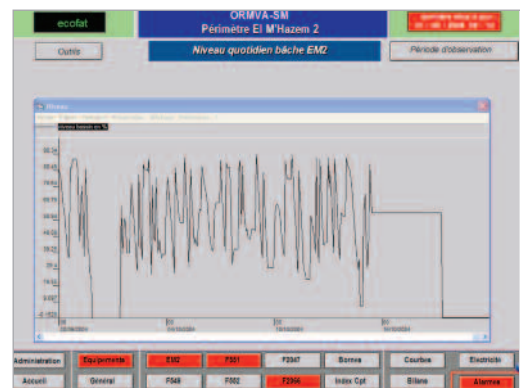

T-BOX LP – Specifications

	Models		
	LP-400	LP-401	LP-450
Analog/Discrete Inputs/Outputs			
Digital inputs, dry contact, 0-12 V dc*	8		
*2 Digital input points are also 1KHz counters. Optional front panel pushbuttons use 2 points.			
Digital outputs, open drain	8		
Analog inputs, 0-5 V dc only	4		
Analog inputs, 0-5 V dc and 0/4-20 mA	4		4
Source low power voltage transmitters via 12 V dc	Yes		
Source 4-20 mA transmitters via 12 and 24 V dc	Yes		Yes
Integral Communications			
RS-232 local "programming" port w/RTS and CTS	Yes		
RS-485 2-wire port	Yes		
RS-232 network port with full modem control option	Yes		
GSM quad band option	Yes		
CDMA option	Contact Semaphore for availability		
Spread spectrum 900 MHz, 2.4 GHz, 9600 baud option	Contact Semaphore for availability		
Power			
	Battery		External Nominal 12 V dc
Internal battery	Lithium D Cell, Saft LSH20-BA		—
Number of batteries	1 or 2		—
Operating voltage	3.6 V dc		8.0 to 16.1 V dc
Battery life calculation and low alarm	Yes		
Average current draw at nominal input voltage	0.1 to 2.6 mA		0.03 to 0.8 mA
Battery life using 2 batteries*	1 to 10 years		N/A
*Please refer to the T-BOX LP Battery Life Calculator spreadsheet to determine life time based on specific operating conditions.			
Processor/Memory			
Processor	Low power Mitsubishi 16-bit microprocessor		
Real time clock	Yes		
Flash	768K		
RAM	128K + 256K (chronologies + sample tables: 72k; additional tables: 256k)		
Environment			
Operating temperature	-40 to 70° C (GSM option requires industrial-grade SIM)		
Storage temperature	-40 to 80° C		
Humidity	5 to 95% RH		
Safety certifications	CE LVD 2006/95/EC; CEBEC IEC 60950-1:2005 (2nd edition) and IEC 60950-1:2006; CAN/CSA C22.2 No. 60950-1-07; ANSI/UL 60950-1, 2nd Edition		
EMC certifications	CE EMC 2004/108/EC, EN61000-4-2, 3, 4, 5, 6, 11, EN61326-1; C-Tick EN61326-1:2006; FCC CFR47: 2008 (Part 15 Sub Part B), EN55011: 1998+A1+A2		
Telecom certifications	Industry Canada RSS-132 Issue 2, RSS-133 Issue 5; A-Tick AS/ACIF S002:2005; Telepermit PTC 211/09/043-044		
Other certifications	GOST-R		
DIN Rail-mounting package			
	T-BOX LP		Battery compartment
Size, inches	5.91 H x 4.53 D x 1.58 W		4.4 H x 4.33 D x 1.97 W
Size, mm	150 H x 115 D x 40 W		112 H x 110 D x 50 W
Weight	300 g (9.65 oz)		140 g (4.83 oz)
IP68 housing — available in two materials			
	Aluminum		Manganese bronze
Approvals	IP68 and Nema 6		IP68, Nema 4x, Nema 6
Size, inches	8.15 H x 3.0 D x 8.15 W		
Size, mm	207 H x 77 D x 207 W		
Weight with GSM, LCD, one battery	2.35 kg (5.2 lb)		6.3 kg (13.86 lb)
Installation	Wall-mount and pipe-mount accessories optional		
LCD and pushbutton option	Yes		
Hazardous Area Approvals			
Class I, Division 2, Groups C, D	Pending		Pending
ATEX Zone 2	Approved		Approved

www.cse-semaphore.com

U.S.A.

CSE Semaphore Inc.
1200 Chantry Place
Lake Mary, FL 32746
U.S.A.

P +1 (407) 333 3235
F +1 (407) 386 6284

Australia

CSE-Semaphore
Unit 8, 3-5 Gilda Crt
Mulgrave, Victoria 3170
Australia

P +61 (03) 8544 8544
F +61 (03) 8544 8555

Europe

CSE-Semaphore Belgium
Waterloo Office Park — Building "M"
Dreve Richelle, 161
B-1410 Waterloo
Belgium

P +32 (2) 387 42 59
F +32 (2) 387 42 75

© 2012 CSE Semaphore Inc. All rights reserved. All marks may be trademarks of their respective owners. 1061037 03/12